

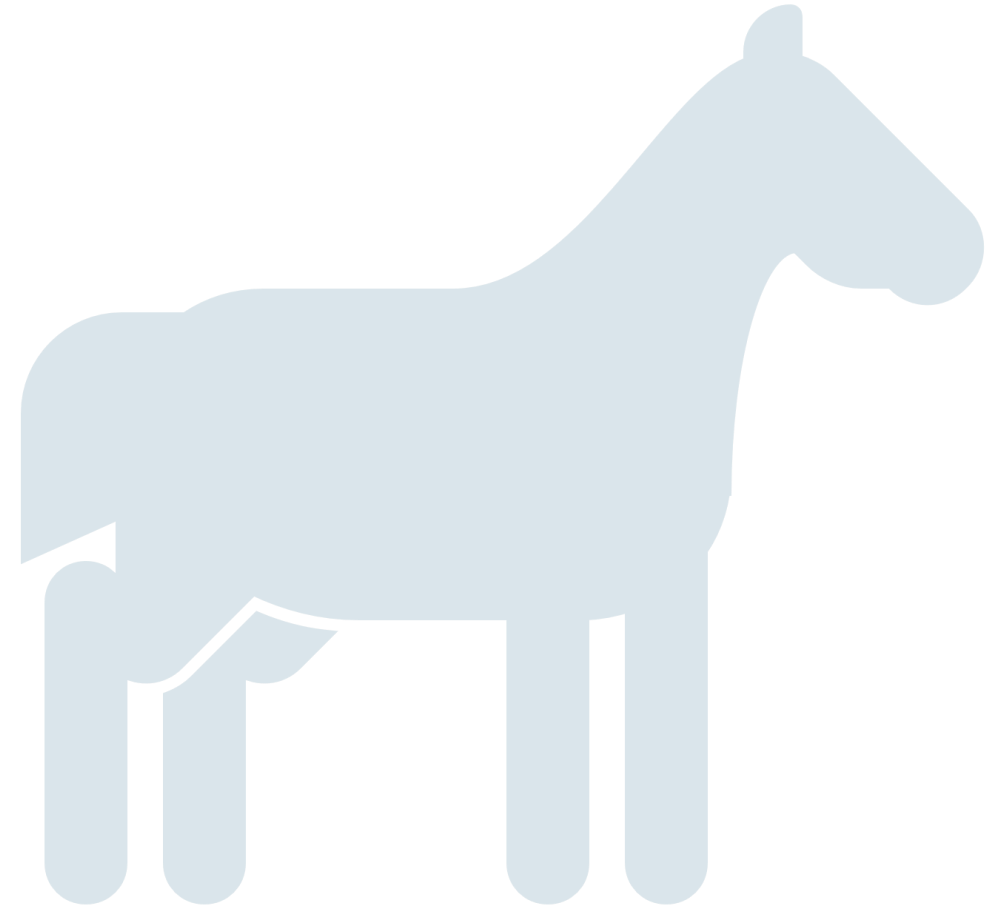


Equestrian Covered Arena Surface & Drainage



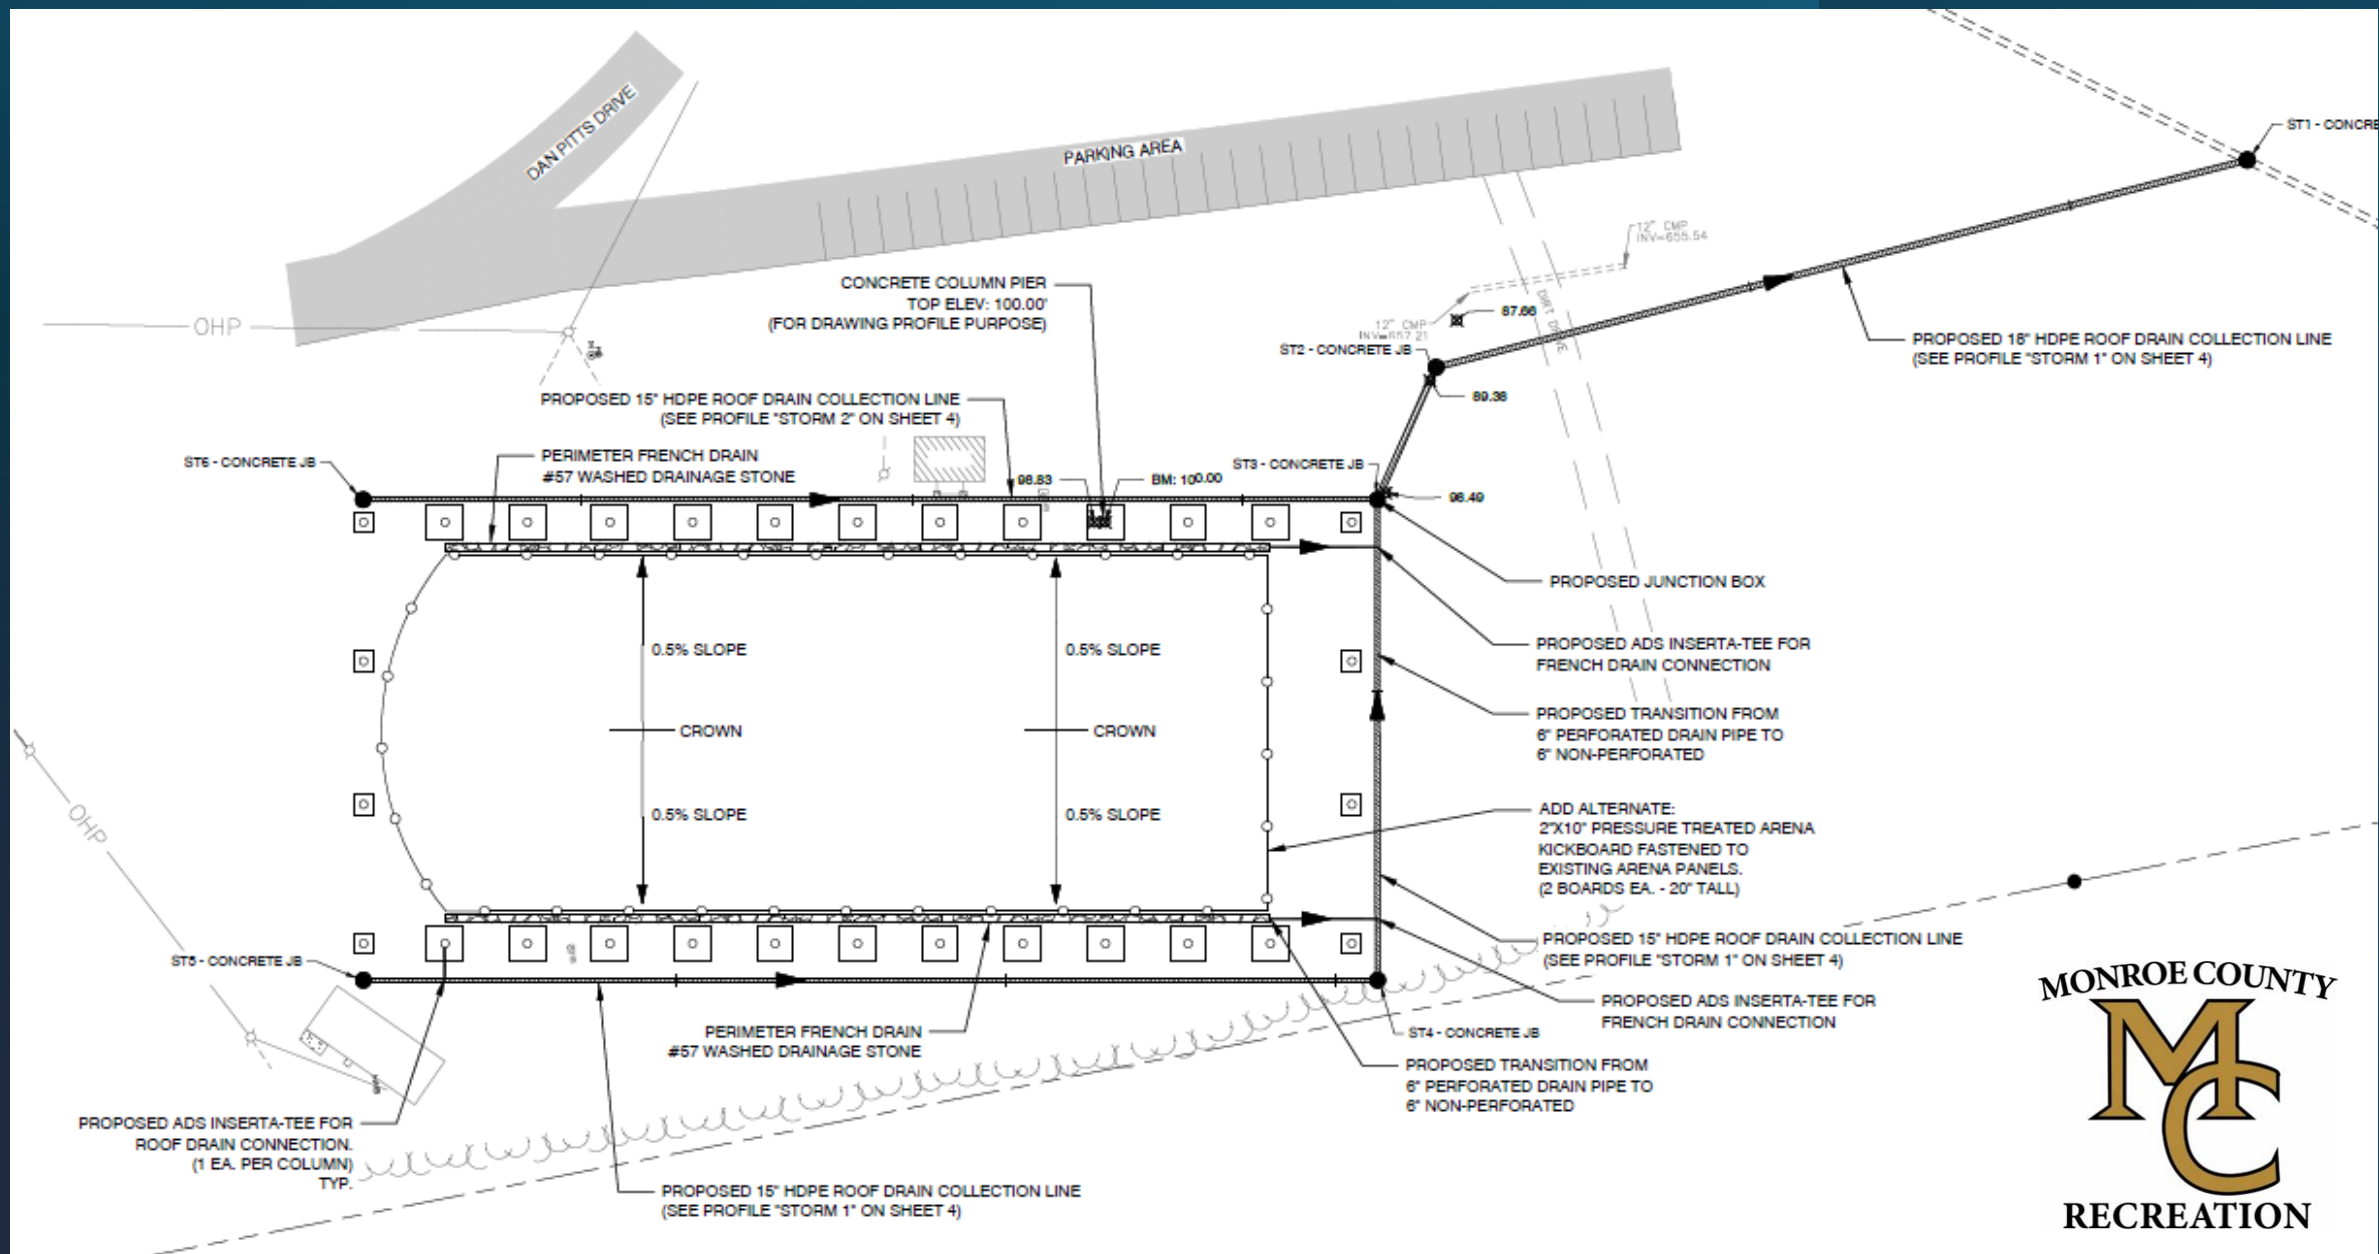

ADD ALTERNATE:
2"x10" PRESSURE TREATED ARENA
KICKBOARD FASTENED TO
EXISTING ARENA PANEL

ARENA PANEL

PERIMETER FRENCH DRAIN
#57 WASHED DRAINAGE STONE

TOP OF CONCRETE COLUMN PIER
ELEV: 100.00'
(FOR DRAWING PROFILE PURPOSE)

0.5% SLOPE

POSITIVE DRAINAGE AWAY
FROM ARENA

SUB-ANGULAR ARENA RIVER SAND

M10 (3/8 INCH MINUS)

CLAY SUBGRADE SHALL
BE PROOF ROLLED AND
COMPACTED TO
STABLE CONDITION

COMPACTED CLAY SUBGRADE

CONCRETE COLUMN PIER

TRENCH DEPTH
VARIES BY
LOCATION

11'X11' CONCRETE FOOTING

NON-WOVEN GEOTEXTILE, CLASS 2 MINIMUM,
MEETING AASHTO M 288 SUBSURFACE
DRAINAGE APPLICATIONS

6" PERFORATED PVC
PIPE IN 30"x18" TRENCH

ARENA CROSS SECTION

N.T.S.



Equestrian Covered Arena						
Surface & Drainage						
Quotes						
				ProForm	Buxton	Preston
Arena Base, Grading, Subgrade, M10, Sand Covering				\$ 59,000	\$ 136,337	\$ 142,800
Storm Drain				\$ 110,000	\$ 111,022	
Perimeter Drain				\$ 9,200	\$ 34,349	
Sprinkler System				\$ 21,522		
Arena Kickboard				\$ 14,364		
Admin & Management				\$ 34,226		
Total Change Order Amount				\$ 248,312	\$ 281,708	\$ 142,800
Previous Contract Amount				\$ 1,094,957		
Revised Contract Amount				\$ 1,343,269		
SPLOST Funding						



Request:

- **Motion to Authorize an Addendum to the Contract to Pro-Form Construction in the Amount of \$248,312.00 for Arena Surface & Drainage.**
- **Second**
- **Discussion**
- **Vote**

